4795 StreamLine Fly First Industrial



Indication of scale

The 4795 StreamLine Fly First Industrial module is designed for sustained operation and boasts the added convenience of over-the-air configuration options. Featuring exceptional positioning accuracy, compact dimensions, and seamless compatibility with an extensive spectrum of input voltages, the 4795 StreamLine Fly First Industrial emerges as the optimal selection across a diverse array of IoT applications.

Key features

General

- Very small, only 50 x 22 x 8 mm
- Lightweight: 8 grams PCBA only
- Wide operating range: -30°C ... +85°C
- 1 LED for user interaction
- Multiple watchdog levels for maximum stability
- Event based free configurable module to fit any job
- Remote configurable to fit any job (both firmware and configuration files can be updated/patched over-the-air)
- Supports integration into third party networks

Optional extras

- eSIM
- 3D accelerometer accurate up to 16 g
- Temperature sensor accurate up to 0.5°C
- CAN-bus

Connectivity

- Excellent telecom coverage
- LTE Cat M1/NB-2/GPRS fallback
- Nano SIM socket

Positioning

- L76 GNSS, external antenna
- WiFi sniffing, external antenna
- Active GPS

Electrical

• Input range +5 ... +55 VDC power

Connectors

- External micro coax antenna LTE
- External power connector

Product summary

The 4795 StreamLine Fly First Industrial represents an ultralight, unobtrusive solution primed for seamless integration with powered assets. This module integrates using the CAN-bus protocol or a wide array of power solutions. With an input voltage range spanning from +5 VDC to +55 VDC, this module stands as the ideal match for a multitude of applications, ranging from e-bikes to heavy machinery.

Straight out of the box, the StreamLine Fly First Industrial module is equipped with a plethora of connectivity and utility options, including an LTE Cat-M1/NB-IoT modem, GNSS, WiFi monitoring capabilities, Bluetooth Smart (BLE), and integrated sensors for acceleration and temperature monitoring.

The module can be customised to specification when ordering in large volumes. Ask your StreamLine products supplier for more details.

Connectivity specifications

 Mobile data modem 	 Quectel BG95-M3 LTE Cat M1/NB-2, GSM module,
	all global certifications, and R&TTE directives
	 Frequency bands: GSM/GPRS: 850/900/1800/1900 MHz
	LTE: B1 5, 8, 12, 13,18, 19, 20, 25, 28
 WiFi scanner 	• ESP32-PICO-D4
	o Frequency: 2412 2484 MHz
	 Protocol: 802.11 b/g/n (802.11n up to 150 Mbps)

Up to 5 BSSID's at a time

Navigation

 Quectel L76 GNSS (Glonass + GPS + A-GPS + Galileo) module
Frequency: L1 1575.42 MHz C/A Code
 33 tracking/99 acquisition channels
 Sensitivity: Acquisition -148 dBm (typical)
 Reacquisition -160 dBm (typical)
 Tracking -165 dBm (typical)
Position accuracy: <2,5 m CEP
 Supports active and passive antennas


Operating temperature

Standard rechargeable LiPo cell: -30°C ... +85°C

Electrical

Rated voltage power supply: +5 ... +55 VDC 450 mA max charging current

Connectors

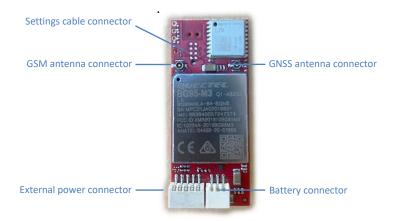



Size: 50 x 22 x 8 mm

Battery connector



Pin	Description
• 1	 Temperature sensor
• 2	Ground
• 3	VCC, +3,4 +4,5 VDC Battery connection

External power connector



Pin	Description
• 1	 VCC, Power +5 +55 VDC
	Variance up to 10%
• 2	CAN Low
• 3	CAN High
• 4	 Ground for CAN and external power
• 5	Internal use only

Optional on-board sensors

 Accelerometer 	 Sensitivity: light vibrations of 0,016 g up to movements of 16 g
	 Sensitivity can be adjusted over-the-air
 Temperature sensor 	 Set alarm thresholds at specified temperatures
	 Accuracy up to 0,5 °C

About StreamLine IoT BV

StreamLine IoT BV is part of a group of companies active in the industry of track & trace modules, IoT solutions and internet portal services since 1995.

Disclaimer

StreamLine IoT BV reserves the right to make changes without further notice to any products herein to improve reliability, function or design. StreamLine does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.







©2024 StreamLine IoT BV The Netherlands www.streamline-iot.com Version 2.10

Click here to view this product on our site.

